


EK Series Self Rotating Pop-Out Nozzle


EK

EK series Self-retractable (Pop out) nozzles are best suitable for applications where the complete flush position is required. It is generally used the areas where the nozzle can get blocked or when the environment is contaminated or explosive.

EK series Pop out nozzle retracts its spray ball when pressure is applied and shut itself to complete flush position when operation is stopped.

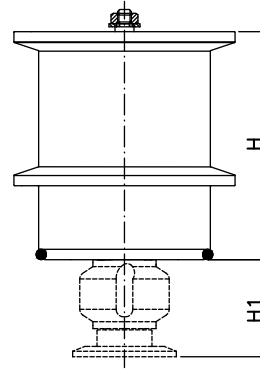

2" TC (DIN32676-A DN50)

Coverage Type	Spray Angle
	270°

MODEL NO.	SPRAY ANGLE	CONNECTION	FLOW CAPACITY IN LPM AT DIFFERENT PRESSURE					G/A DIMENTION	
			PRESSURE [BAR]					H	H1
			1.5	2	3	5	7		
EK2.200	D	2" TC	17.32	20.0	24.49	31.62	37.42	66	28
EK2.250	D	2" TC	21.65	25.0	30.62	39.53	46.77	Weight (Metals) = XX Approx	
EK2.300	D	2" TC	25.98	30.0	36.74	47.43	56.12		
EK2.350	D	2" TC	30.31	35.0	42.87	55.34	65.48		
EK2.400	D	2" TC	34.64	40.0	48.99	63.25	74.83		

* Note: Connections are available in threaded and TC end.